




Delta P Carver

We Put the PSI in Water Systems

- Low Operating Cost
- High Head Low Flow Rates
- Any Replacement or Retrofit
- 304 SS Frames & Manifolds
- Variable Speed Drives
- 3 Year Warranty
- 6 inch LCD Color Touch Screen

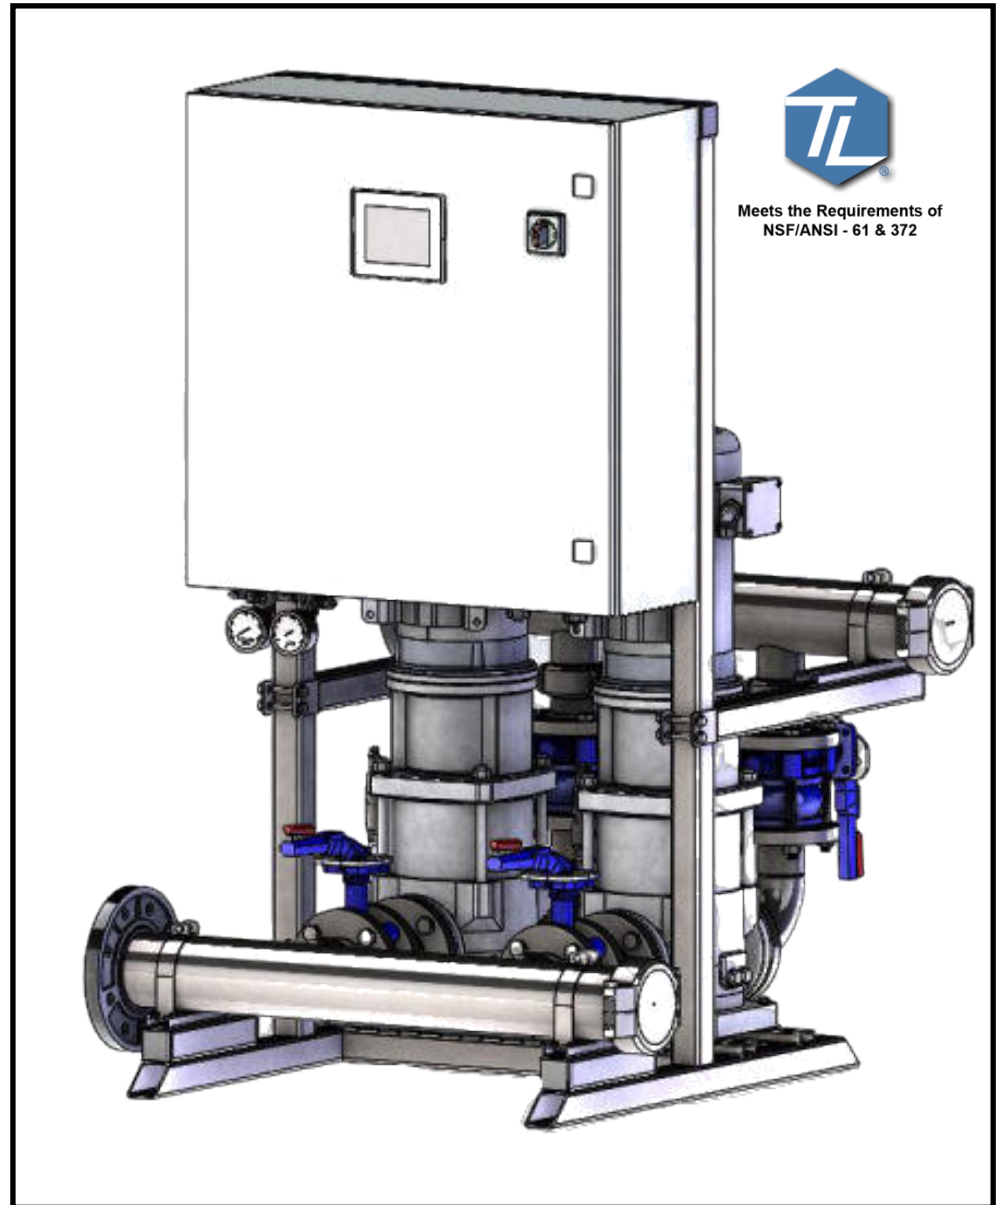

Delta Pak - VM


Domestic Water Booster Systems

Designed to be Efficient, Built to Last & Programmed to Deliver

www.deltapcarver.com
sales@deltapcarver.com

Among its many advantages, the Delta Pak - VM offers the technical design features of:

- ▲ Single Point Power Main Disconnect
- ▲ Manual Motor Protector (MMP) 65KAIC
-Field Resettable
- ▲ VFD Controls with Programmable Set Points
- ▲ NSF 61/372 System Certification
- ▲ Standard Cabinet SCCR Rating: **5kA**
- ▲ **UL 508A** Certified Control Panel
- ▲ Individual VFD for Each Pump
- ▲ Low Voltage – 24V DC Touch Safe Controls
- ▲ PLC with Ethernet Capability, Building Communication (BACnet, LONWORKS and More)
- ▲ Simplex, Duplex, Triplex, and Quadplex Configurations
- ▲ Thermal Relief Valve for Each Pump
- ▲ Max System Temperature: **248° F**
- ▲ Inlet and Outlet Connection Rolled Groove Flange
- ▲ Factory Certified **3yr** System Warranty
- ▲ ANSI/ASHRAE/IES Standard 90.1

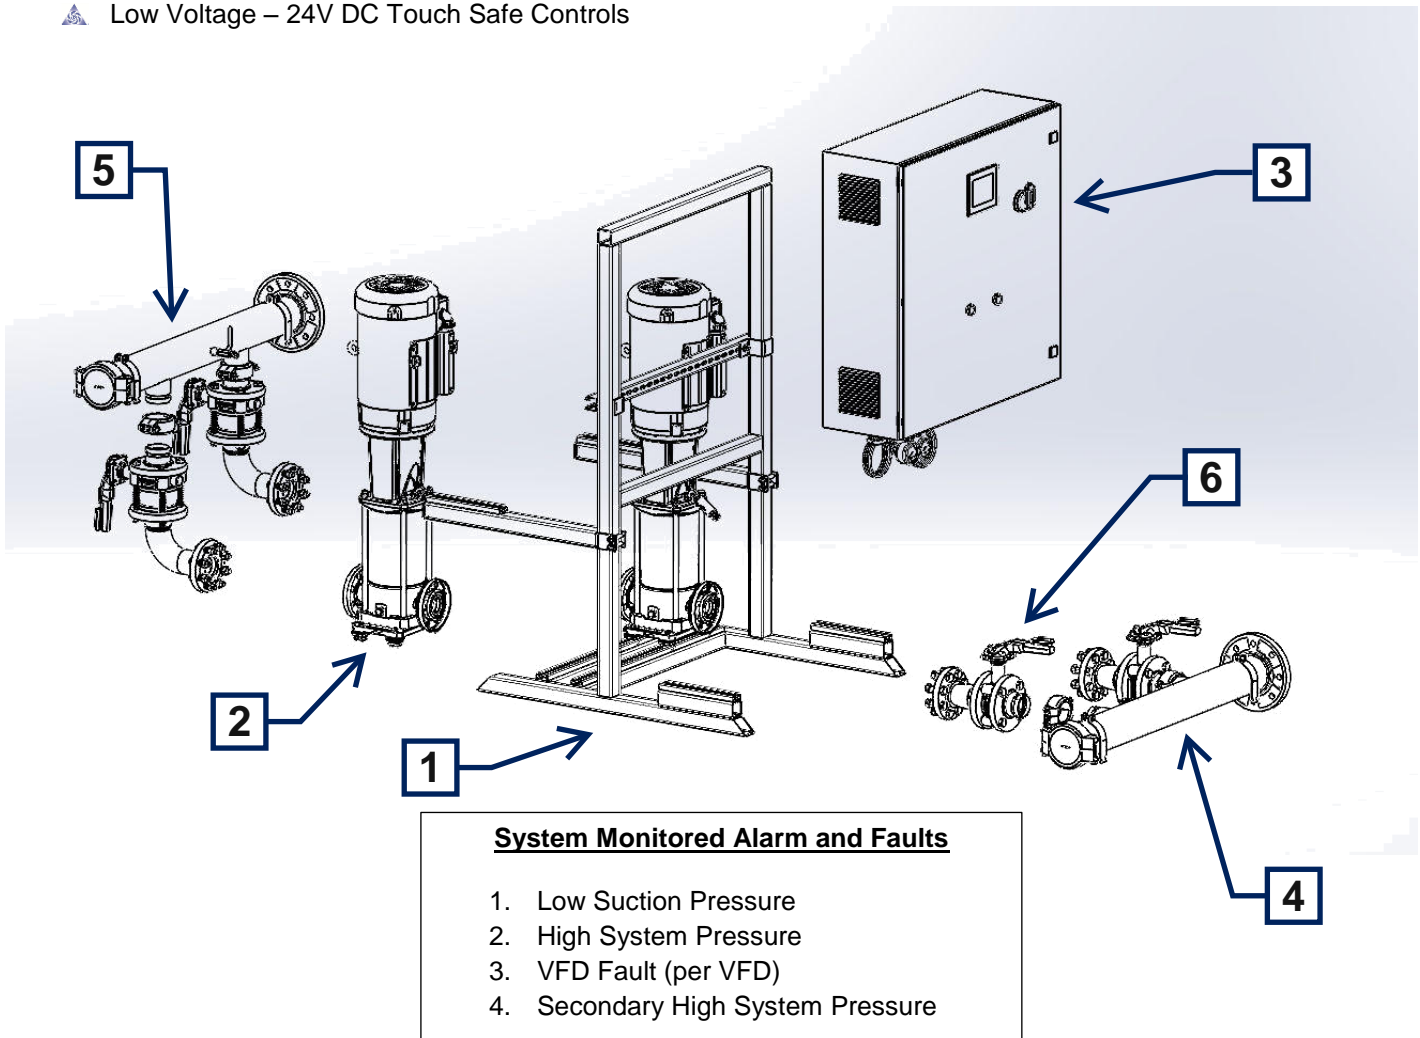

ITEM NO.	DESCRIPTION
1	Frame Assembly
2	Pump Assembly
3	Control Pak

ITEM NO.	DESCRIPTION
4	Manifold Assembly Suction (600 PSI)
5	Manifold Assembly Discharge (600 PSI)
6	Stainless Steel Internal Butterfly Isolation Valve (150/300 PSI)